




ROOFGRIP

Reinforced Waterproofing System

TECHNICAL DATA

ELASTOGRIP RL 300

SBS TORCH ON MEMBRANE

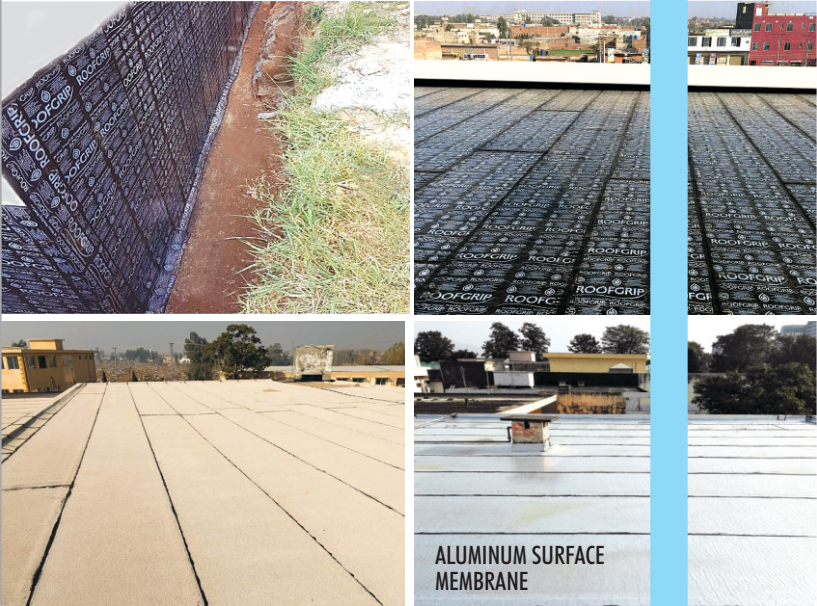

ALUMINUM SURFACE MEMBRANE

DESCRIPTION

ELASTOGRIP RL-300 is SBS (Styrene Butadiene Styrene) high performance polymer modified bituminous membrane reinforced with 140-160gr/m² rot-proof, non woven spun bonded polyester carrier and polymers mixed bitumen makes the membrane highly resistant to water, temperature, UV radiation and mechanical strength.

USES

The membrane has versatile uses for its durability and flexibility at low temperature and stability at high temperature, that is why it has been recommended for all type of waterproofing requirements e.g. roofs, basements tanking, retaining walls, bridges and multi-story car parking. The ELASTOGRIP SBS membranes with Granules and Aluminum finished surface, can be left expose to weather.

SURFACING

RL-300 top and bottom sides with polyethylene film.
RLA-300 top surface with Aluminum foil finished.
RLG-300 top surface with granules finished.

STORAGE

Rolls should always be stored vertically in dry shaded area on smooth surface.

APPLICATION

ELASTOGRIP SBS membrane can be applied as follows:

- 1. Fully Bonded**
 - 2. Partially Bonded**
 - 3. Loose Laid**
- (Recommended for Lean)

Fully Bonded: The membrane should start from the lowest point at drains, unrolled the membrane roll to a full length, stretch and align in straight line, roll the membrane back without disturbing the alignment, the torching should be done by the skilled technician, start torching the under side of the membrane roll so that the PE film is fused and as the membrane coating is sufficiently melted push onward the roll to bond to the primed substrate, the next roll should be laid in the same way with 3 inches side lap and 4 inches end lap, all overlaps should be torch sealed and smooth using hot trowel.

Partially Bonded: Partially or spot bonded is applied to the concrete surface to prevent from wind uplift and to control the membrane forming bubbles. The arrangement and setting of the membrane shall be in the same way as describe above, but the torching shall be applied on the membrane with spot and gaps maintaining the overlap 3 inches side lap and 4 inches end lap, all overlaps should be torch sealed and smooth using hot trowel.

Loose Laid: Loose laid application is recommended on lean concrete surface, the arrangement and setting of the membrane shall be in the same way as describe above, the torching shall be applied on 3 inches side lap and 4 inches end lap, all overlaps should be fully torch sealed and smooth using hot trowel.

Primer Grip: Primer Grip shall be applied in all type of membrane application. All surfaces must be smooth, clean and dry to receive PRIMER GRIP.





TECHNICAL DATA ELASTOGRIP RL 300

SBS TORCH ON MEMBRANE



PROPERTIES	TEST VALUES	TEST METHOD STANDARD
Roll Size (meter)	1 x 10	
Membrane Thickness (mm)	Mini. (3mm)	ASTM D 751
Mass Per Unit Area (g/m ²)	> 3800	EN 1849-1
Upper Surface RL-300	Polyethylene Film	
Upper Surface RLA-300	Aluminum Foil	
Upper Surface RLG-300	Granules Finished	
Lower Surface	Polyethylene Film	
Type of Coating Compound	SBS (Styrene Butadine Styrene) Modified Bitumen	
Softening Point (°C)	> 110	ASTM D 36
Cold Flexibility at -20 °C To -25 °C	No Cracking	ASTM D 146, D 5147 & UEAtc
Reinforcement	Polyester	ASTM D 146 & UEAtc
Tensile Strength, N/5cm Longitudinal Transversal	> 750 > 600	ASTM D 5147, ASTM D 412 & ASTM D 146
Elongation at Break, % Longitudinal Transversal	> 45 > 54	ASTM D 5147, ASTM D 412 & ASTM D 146
Tear Resistance, N Longitudinal Transversal	> 275 > 270	ASTM D 1004, ASTM D 624 ASTM D 751 & ASTM D 5147
Heat Resistance to 120 °C	No Flow	ASTM D 5147
Hydrostatic Pressure (Bar/ Psi)	7 / 101	ASTM D 5385
Puncture Resistance (N)	> 500	ASTM D 5147 & UEAtc
ROOFGrip MEMBRANES ARE ENVIRONMENTAL AND NATURE FRIENDLY		

IMPORTANT NOTES

- Our complete product range is full compliance with mentioned ASTM ISO 9001:2015 & OHSAS 45001:2018.
- We are only approved with PSQCA in polymer modified bituminous membrane.
- ASTM D 146 is used for felt base bitumen membrane.
- ASTM D 5147 is used for non-woven polyester carrier modified membrane.
- ASTM D 412 is used for rubber like flexible material.
- The above results obtain in the laboratory from our quality control are to the best of our knowledge.
- All reasonable care has taken in preparing this technical information.
- Due to our policy of continue R&D client requirement environmental, climate change technical data described herein can vary.
- According to the standards a variation of 10% is expected.



ROOFLINE GROUP OF COMPANIES

Corporate Office: 54-E, Mohafiz Town, Multan Road, Lahore.

PABX: 042-35457688, 35457699

Fax: 042-35457689

- **Islamabad Office:**
1-Km Malang Jan Street, G.T. Road, Zahidabad, Tarnol, Islamabad.
Tel: (051) 2256421
Cell: 0302-8551907,
- **Faisalabad Office:**
82-B, Commercial Center, Millat Chowk, Faisalabad.
Tel: (041) 8580233

- **Karachi Office:**
House No. C-13, Block -B, Gulshan-e-Jamal, Karachi.
Tel: (021) 34583591

- **Peshawar Office:**
Room # 14, 1st Floor, New Akbar Market, Achani Chowk, Ring Road, Peshawar.
Cell: 0301-8551907