




ROOFGRIP

Reinforced Waterproofing System

PLASTOGRIP RLG 300

APP MODIFIED BITUMINOUS TORCH ON MEMBRANE
WITH GRANULES FINISH

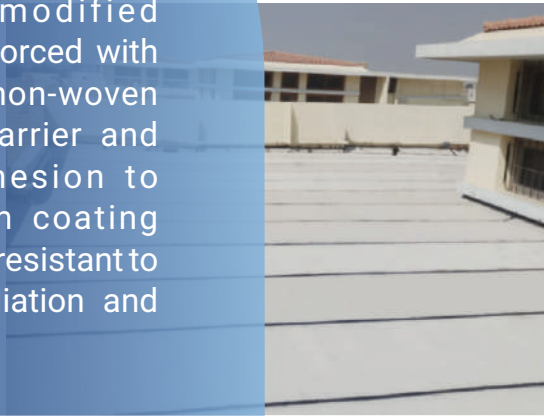

DESCRIPTION

PLASTOGRIP RLG-300 is APP (Atactic Polypropylene) high performance polymer modified bituminous membrane reinforced with 140-160gr/m² rot-proof, non-woven spun bonded polyester carrier and Granules with firm adhesion to polymers mixed bitumen coating makes the membrane highly resistant to water, temperature, UV radiation and mechanical strength.

• USES

The membrane has versatile uses for its durability and flexibility at low temperature and stability at high temperature, that is why it has been recommended for application, exposed to all types of weather and it does not required to cover with tiles or screed.

• APPLICATIONS

PLASTOGRIP RLG-300 membrane can be applied as follows:

Fully Bonded

The membrane should start from the lowest point at drains, unrolled the membrane roll to a full length, stretch and align in straight line, roll the membrane back without disturbing the alignment, the torching should be done by the skilled technician, start torching the under side of the membrane roll so that the PE film is fused and as the membrane coating is sufficiently melted push onward the roll to bond to the primed substrate, the next roll should be laid in the same way with 3 inches side lap and 4 inches end lap, all overlaps should be torch sealed and smooth using hot trowel.

Primer Grip

Primer Grip shall be applied in all type of membrane application. All surfaces must be smooth, clean and dry to receive PRIMER GRIP.

• SURFACING

RLG-300 top surface with granules finished. It posses excellent saturation properties, firm adhesion to Modified Membrane Coating which gives the membrane resistance to perforation, penetration and anti-corosion and enhance the life of membrane.

• STORAGE

Rolls should always be stored vertically in dry shaded area on smooth surface.





Technical Data PLASTOGRIP RLG 300

TORCH ON MEMBRANE



PROPERTIES	TEST VALUES	TEST METHOD COMPLIANCE
Roll Size (meter)	1 x 10	
Membrane Thickness (mm)	Mini. (3mm)	ASTM D 751
Mass Per Unit Area (g/m ²)	> 3800	EN 1849 - 1
Upper Surface	Granules Finished	
Lower Surface	Polyethylene Film	
Type of Coating Compound	APP (Atactic Poly Propylene) Modified Bitumen	
Softening Point (°C)	> 140	ASTM D 36
Cold Flexibility at (-3°C to -5°C)	No Cracking	ASTM D 5147, ASTM D 146 & UEAtc
Reinforcement	Polyester	ASTM D 146 & UEAtc
Tensile Strength, N/5cm Longitudinal Transversal	> 750 > 650	ASTM D 5147, ASTM D 146 ASTM D 412
Elongation at Break, % Longitudinal Transversal	> 40 > 45	ASTM D 5147, ASTM D 146 ASTM D 412
Tear Resistance, N Longitudinal Transversal	> 230 > 260	ASTM D 5147, ASTM D 146, UEAtc ASTM D 751
Heat Resistance to 120°C	No flow	UEAtc
Hydrostatic Pressure (Bar/ Psi)	7 / 101	ASTM D 5385
Puncture Resistance (N)	> 500	ASTM D 5147 & UEAtc

ROOFGRIP MEMBRANES ARE ENVIRONMENTAL AND NATURE FRIENDLY

IMPORTANT NOTES

- Our complete product range is full compliance with mentioned ASTM ISO 9001:2015 & OHSAS 45001:2018.
- We are only approved with PSQCA in polymer modified bituminous membrane.
- ASTM D 146 is used for felt base bitumen membrane.
- ASTM D 5147 is used for non-woven polyester carrier modified membrane.
- ASTM D 412 is used for rubber like flexible material.
- The above results obtain in the laboratory from our quality control are to the best of our knowledge.
- All reasonable care has taken in preparing this technical information.
- Due to our policy of continue R&D client requirement environmental, climate change technical data described herein can vary.
- According to the standards a variation of 10% is expected.



ROOFLINE GROUP OF COMPANIES

Corporate Office: 54-E, Mohafiz Town, Multan Road, Lahore.

PABX: 042-35457688, 35457699

Fax: 042-35457689

- **Islamabad Office:**
1-Km Malang Jan Street, G.T. Road, Zahidabad, Tarnol, Islamabad.
Tel: (051) 2256421
Cell: 0302-8551907,
- **Faisalabad Office:**
82-B, Commercial Center, Millat Chowk, Faisalabad.
Tel: (041) 8580233

- **Karachi Office:**
House No. C-13, Block -B, Gulshan-e-Jamal, Karachi.
Tel: (021) 34583591

- **Peshawar Office:**
Room # 14, 1st Floor, New Akbar Market, Achani Chowk, Ring Road, Peshawar.
Cell: 0301-8551907